




NET INTERMITTENT POWER (kW/hp) Potencia Neta Intermitente	17 / 22.8
RATED SPEED (RPM) Velocidad de Regimen	3600

3TNM74F-NHGE

SPECIFICATION Especificacion	NHGE
CYLINDERS Cilindros	3
BORE X STROKE Diámetro x Carrera	74 x 77 (mm) 2.91 x 3.03 (in)
DISPLACEMENT Cilindrada	993 (cc) 60.6 (ci)

Dimensions & Performance Data & Quick Specs	Length (w/fan) / Longitud	21.9 in (556 mm)
	Width / Ancho	16.6 in (422 mm)
	Height / Altura	22.4 in (568 mm)
	Dry Weight / Peso en Seco	242 lbs (110 kg)

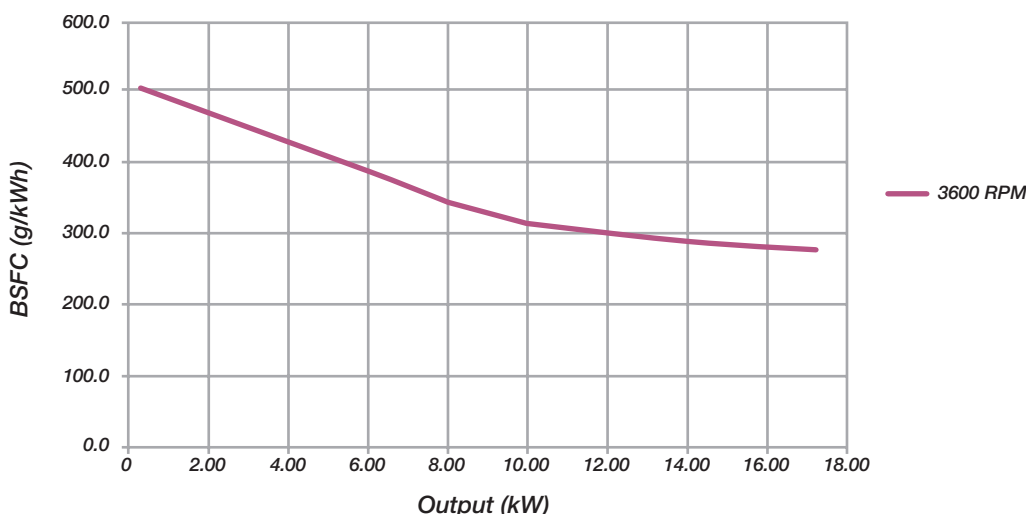

COMBUSTION TYPE

Tipo de Combustion

Indirect Injection
Inyeccion Indirecta

ASPIRATION

Aspiracion

Naturally Aspirated
Aspiracion Natural

GOVERNOR TYPE

Tipo de Gobernador

Mechanical
Mecanico



Now Even More Reliable

The new line of Final Tier 4 engines continues to build upon the legendary reliability of the Yanmar TNV line with a focus on vibration reduction and higher-strength materials. The result is an engine more than capable of handling the most demanding applications.



Final Tier 4

Building off the proven TNV design, Yanmar has achieved superior exhaust emissions by improving the combustion chamber and increasing the displacement and compression ratio. Yanmar engines meet the strict NTE and NRTC test requirements for 2014 Final Tier 4.



Better Fuel Efficiency, Fewer Emissions

Yanmar continues its reputation for superior starting characteristics by refining the combustion process to assure more precise fuel delivery and control. The result is reduced emissions, improved performance over a wide range of applications and increased fuel economy.

Lubrication System

3.4L Capacity Deep Oil Pan

Electrical System

12V, 40A Alternator

Fuel System

In-line MC Fuel Injection Pump

Cooling System

Water Pump, Belt-driven

Power Take Off

FWH: SAE #5 t=111

FW: SAE 6.5"